

# asv ATTACHMENTS





# ATTACHMENTS

## BUILT TOUGH TO TAKE ON THE TOUGHEST JOBS IN NATURE.

ASV attachments give you the tools you need to accomplish major projects, featuring seamless compatibility so you can have total confidence in your fit and performance for years to come. Plus, every attachment comes with a 24-month warranty to ensure you have a tool as reliable as your ASV. Discover what's right for your property, business, or residence and call your local ASV dealer to get started.



## CONTENTS

STANDARD BUCKETS .....	4	SNOWBLOWERS.....	17
TOOTH BUCKETS .....	5	SNOW PUSHERS .....	17
LIGHT MATERIAL BUCKETS .....	5	ANGLE BLADES .....	18
4-IN-1 MULTIPURPOSE BUCKETS.....	6	V-BLADES .....	18
LONG FLOOR BUCKETS .....	6	TRENCHERS .....	20
PALLET FORKS .....	7	BRUSH MOWERS.....	21
RECEIVER PLATES/BALL HITCHES.....	7	SOIL CONDITIONERS .....	21
GRADING BLADES .....	8	AUGER DRIVES .....	22
COLD PLANERS .....	9	AUGER BITS .....	22
TELEBOOMS .....	9	STUMP GRINDERS .....	23
ANGLE BROOMS.....	10	GRAPPLE RAKES .....	24
CONCRETE BREAKERS .....	10	GRAPPLE BUCKETS.....	24
SD SERIES FORESTRY MULCHERS.....	13		
DC SERIES FORESTRY MULCHERS.....	13		

# STANDARD BUCKETS



ASV buckets come in a variety of sizes, and attach quickly and easily to your machine.

- Standard width buckets
- Replaceable bolt-on cutting edge
- Tooth bar compatible

COMPATIBLE MODELS	PART NO.	DESCRIPTION	TOOTH BAR PART NO.	STRUCK CAPACITY* (FT3)	WEIGHT (LBS)
RT-25 / RT-40	0405-204	48 inch Dirt Bucket, w/o BOCE	0405-217	5.2	179
RT-25 / RT-40	0405-205	48 inch Dirt Bucket, w/ BOCE	N/A	5.2	218
RT-40**	0405-206	54 inch Dirt Bucket	2014-914	6.5	285
RT-50	0405-207	60 inch Dirt Bucket	2015-229	10.8	448
RT-65 / VT-70 / VT-75	0405-423	67 inch Dirt Bucket	2045-670	13.2	506
RS-75 / RT-75 / VS-75 / VT-80	0500-502	72 inch Dirt Bucket	0402-610	14.9	714
VT-100 / RT-135	0405-356	78 inch Dirt Bucket	N/A	16.1	751
VT-100 / RT-135**	0405-381	84 inch Dirt Bucket	N/A	17.5	793

\*approximate \*\*optional width based on application

## BUCKETS, FORKS & ADAPTERS

Our wide selection of buckets, forks and adaptors make quick work of your next task, and there's one available for any job that's in front of you.

# TOOTH BUCKETS



All tooth buckets feature replaceable cast teeth with a cast shank welded directly to the bucket edge.

- Standard width bucket
- Welded shank
- Replaceable cutting teeth

COMPATIBLE MODELS	PART NO.	DESCRIPTION	NUMBER OF TEETH	STRUCK CAPACITY* (FT3)	WEIGHT (LBS)
RT-25 / RT-40	0405-211	48 inch Tooth Bucket	5	5.2	216
RT-40**	0405-212	54 inch Tooth Bucket	6	6.5	297
RT-50	0405-213	60 inch Tooth Bucket	6	10.8	410
RT-65 / VT-70 / VT-75	0405-426	67 inch Tooth Bucket	7	13.2	458
RS-75 / RT-75 / VS-75 / VT-80	0405-427	72 inch Tooth Bucket	8	14.9	656
RS-75 / RT-75 / VS-75 / VT-80**	0405-428	74 inch Tooth Bucket	8	15.3	668
VT-100 / RT-135	0405-357	78 inch Tooth Bucket	9	16.1	711
VT-100 / RT-135**	0405-384	84 inch Tooth Bucket	10	17.4	753

\*approximate \*\*optional width based on application

# LIGHT MATERIAL BUCKETS



Featuring more capacity than a standard bucket, the light material bucket is ideal for snow, wood shavings, sawdust, pellets, mulch, feeds, fertilizers, bedding, and other applications.

- Replaceable cutting edge
- Vertical bracing for increased rigidity
- Windows for increased operator visibility (72"+ models)

COMPATIBLE MODELS	PART NO.	DESCRIPTION	STRUCK CAPACITY* (FT3)	WEIGHT (LBS)
RT-25 / RT-40	0405-226	48 inch Light Material Bucket	7.9	206
RT-50 / RT-65 / VT-70 / VT-75	0405-429	66 inch Light Material Bucket	20.4	626
RT-65 / VT-70 / RS-75 / RT-75 / VS-75 / VT-75 / VT-80	0405-430	72 inch Light Material Bucket	26.6	929
RS-75 / RT-75 / VS-75 / VT-80 / RT-135 / VT-100	0405-353	78 inch Light Material Bucket	28.8	835
VT-100 / RT-135	0405-354	84 inch Light Material Bucket	31.0	948
VT-100 / RT-135	0405-355	96 inch Light Material Bucket	35.5	959

\*approximate

# 4-IN-1 MULTIPURPOSE BUCKETS



With multiple functions in one attachment you can save precious time and money dozing, clamming, leveling, and bottom dumping.

- Guarded two-cylinder design
- NitroSteel™ cylinder rods and Teflon™ coated bushings on all pivots
- Replaceable bolt-on cutting edge

COMPATIBLE MODELS	PART NO.	DESCRIPTION	STRUCK CAPACITY* (FT3)	WEIGHT (LBS)
RT-25 / RT-40	0405-229	48 inch Multipurpose Bucket	4.9	440
RT-65 / VT-70 / VT-75	0405-431	67 inch Multipurpose Bucket	12.5	1006
RT-65 / VT-70 / RS-75 / RT-75 / VS-75 / VT-75 / VT-80	0405-432	72 inch Multipurpose Bucket	13.3	1199

\*approximate

# LONG FLOOR BUCKETS



The heavy-duty low profile dirt bucket is easily visible from the cab and provides convenient material movement and grading performance.

- Grading bend for optimal grading in reverse and easy cleanout
- Heavy duty bracing
- Replaceable cutting edge

COMPATIBLE MODELS	PART NO.	DESCRIPTION	TOOTH BAR PART NO.	STRUCK CAPACITY* (FT3)	WEIGHT (LBS)
VT-100 / RT-135	0405-463	78 inch Long Floor Bucket, w/ BOCE	N/A	15.4	865

# PALLET FORKS



Our heavy-duty pallet forks couple easily and make moving, maintaining, and organization easy.

- Adjustable tines
- Heavy duty frame
- High visibility brick guard

COMPATIBLE MODELS	PART NO.	DESCRIPTION	TINE LENGTH (IN)	CAPACITY (LBS)	WEIGHT (LBS)
RT-25 / RT-40	0405-277	36 inch Pallet Fork Assembly	36	4000	330
RT-50 / RT-65 / VT-70 / VT-75 / VT-80	0405-251	42 inch Pallet Fork Assembly	42	4000	346
RT-65 / VT-70 / RS-75 / RT-75 / VS-75 / VT-75 / VT-80 / VT-100 / RT-135	0405-252	48 inch Pallet Fork Assembly	48	6200	455

# RECEIVER PLATES/BALL HITCHES



A receiver hitch plate allows you to conveniently maneuver equipment, especially in tight spaces, without additional manpower.

- Standard 2" receiver
- Safety steps

COMPATIBLE MODELS	PART NO.	DESCRIPTION	GROSS TRAILERING (LBS)	MAX TONGUE WEIGHT (LBS)	WEIGHT (LBS)
RT-25 / RT-40	0405-247	Plate, Hitch Receiver, ASV Mount	3000	1000	80
RT-50 / RT-65 / VT-70 / RS-75 / RT-75 / VS-75 / VT-75 / VT-80 / VT-100 / RT-135	0405-362	Plate, Hitch Receiver, ISO Mount	12000	2000	107

# GRADING BLADES



Use your machine for dozing, scraping, cutting swales and leveling with the six-way hydraulically controlled ASV grading blade.

- Easy to operate
- Heavy-duty construction
- Adjustable depth shoes
- Bolt-on, reversible three-piece cutting edge

COMPATIBLE MODELS	PART NO.	DESCRIPTION	WIDTH (IN)	WIDTH - ANGLED (IN)	WEIGHT (LBS)	SIDE ANGLE (DEG)	TILT ANGLE (DEG)
RT-65 / VT-70 / RS-75 / RT-75 / VS-75 / VT-75 / VT-80 / VT-100 / RT-135	0405-377	Dozer, Grading/Leveling, 6-way, 78 inch	78	67.5	800.0	30.0	11.5
RS-75 / RT-75 / VS-75 / VT-80 / VT-100 / RT-135	0405-378	Dozer, Grading/Leveling, 6-way, 96 inch	96	83.0	970.0	30.0	11.5

# CONSTRUCTION

Get more done in more places with rugged ASV construction attachments.

# COLD PLANERS



Cut asphalt and concrete with one attachment with easy maneuverability around manholes and other obstacles.

- Side shift and depth control adjustments for operation in a wide variety of environments
- Solid drum design creates fine, recyclable aggregate
- Adjustable skid shoes help manage uneven terrain
- High torque from planetary drum drive

COMPATIBLE MODELS	PART NO.	DESCRIPTION	CUTTING WIDTH (IN)	CUTTING DEPTH (IN)	WEIGHT (LBS)	FLOW RATE (GPM)	NUMBER OF TOOLS
RT-75 / VT-80 / VT-100 / RT-135	0405-295	24 inch Multifunction Cold Planer	24	0-6	1750	25-56	60

# TELEBOOMS



Reach working heights and hold material securely without additional equipment beyond a compact track loader or skid steer.

- Use for general construction, truss installation and material handling
- Extends beyond 21 feet
- Durable, lightweight tubular steel
- 72-inch hydraulic extension

COMPATIBLE MODELS	PART NO.	DESCRIPTION	LENGTH FULLY CONTRACTED (IN)	RATED LOAD (CONTRACTED) (LBS)	LENGTH FULLY EXTENDED (IN)	RATED LOAD (EXTENDED) (LBS)	WEIGHT (LBS)
RT-65 / VT-70 / RS-75 / RT-75 / VS-75 / VT-75 / VT-80 / VT-100 / RT-135	0405-294	Hyd. Teleboom	112	750	256	350	450

# ANGLE BROOMS



ASV angle brooms are robust and easy to use, for effective sweeping of dirt, snow and other unwanted material.

- High-gauge steel construction
- Angle side to side
- Quickly mounts on skid steer or compact track loader

COMPATIBLE MODELS	PART NO.	DESCRIPTION	WIDTH (IN)	FLOW RANGE (GPM)	WEIGHT (LBS)	ANGLE DEGREES	WAFER DIA. (IN)	NUMBER OF SECTIONS
RT-25 / RT-40	0405-293	60 inch Hyd. Angle Broom, ASV Mount	60	7-17	385	25	24	20
RT-65 / VT-70 / RS-75 / RT-75 / VS-75 / VT-75 / VT-80	0405-291	72 inch Hyd. Angle Broom	72	13-24	850	30	32	38
RS-75 / RT-75 / VS-75 / VT-80 / VT-100 / RT-135	0405-292	84 inch Hyd. Angle Broom	84	13-24	900	30	32	44

# CONCRETE BREAKERS



Two sizes to help you break even the toughest conditions.

- Central lubrication
- Field replaceable bushings
- Effective noise and vibration dampening components

COMPATIBLE MODELS	PART NO.	DESCRIPTION	WEIGHT (LBS)	IMPACT RATE (BPM)
RT-25 / RT-40	0405-276	Breaker, ASV, Hydraulic, 110X	258	560-1700
RT-50 / RT-65 / VT-70 / RT-75 / VS-75 / VT-75 / VT-80 / VT-100 / RT-135	0405-367	Breaker, ISO, Hydraulic, 310X	665	520-1300





# MULCHERS

To conquer overgrowth, clear the land  
and get the job done—every time.

# SD SERIES FORESTRY MULCHERS



Durable, easy to attach and loaded with relentless carbide teeth.

- Carbide teeth for high performance and long wear life
- Heavy-duty construction ensures strength and durability
- Productive and versatile for mulching in all conditions
- 2-year warranty

COMPATIBLE MODELS	PART NO.	DESCRIPTION	WIDTH (IN)	CUTTING WIDTH (IN)	WEIGHT (LBS)	FLOW RATING (GPM)	TOOL TYPE	# OF TOOLS
RT-75HD / VT-80F	0405-280	SD50C	65	50	2450	36-40	Carbide	24
VT-100F	0405-509	SD61C	76	61	2790	40	Carbide	30
RT-135F	0405-278	SD61C	76	61	2790	50	Carbide	30
RT-135F	0405-506	SD72C	87	72	3140	50	Carbide	36

# DC SERIES FORESTRY MULCHERS




Knife-equipped so your CTL can tear through stringy, fibrous vegetation.

- Knife-equipped, double-sided and easy to rotate to a fresh cutting edge
- Rotor with depth control to easily manage workload
- Finely process dense, stringy and fibrous material in one pass
- 2-year warranty

COMPATIBLE MODELS	PART NO.	DESCRIPTION	WIDTH (IN)	CUTTING WIDTH (IN)	WEIGHT (LBS)	FLOW RATING (GPM)	TOOL TYPE	# OF TOOLS
RT-65 / VT-70HO / VT-75*	0405-505	DC60K	71	60	1465	28	Knife	26
RT-75HD / VT-80F	0405-281	DC62K	76	62	2600	36-40	Knife	24
VT-100F	0405-510	DC62K, 3/4" Coup.	76	62	2600	40	Knife	24
RT-135F	0405-279	DC76K	91	76	2980	50	Knife	30

\*poly door required



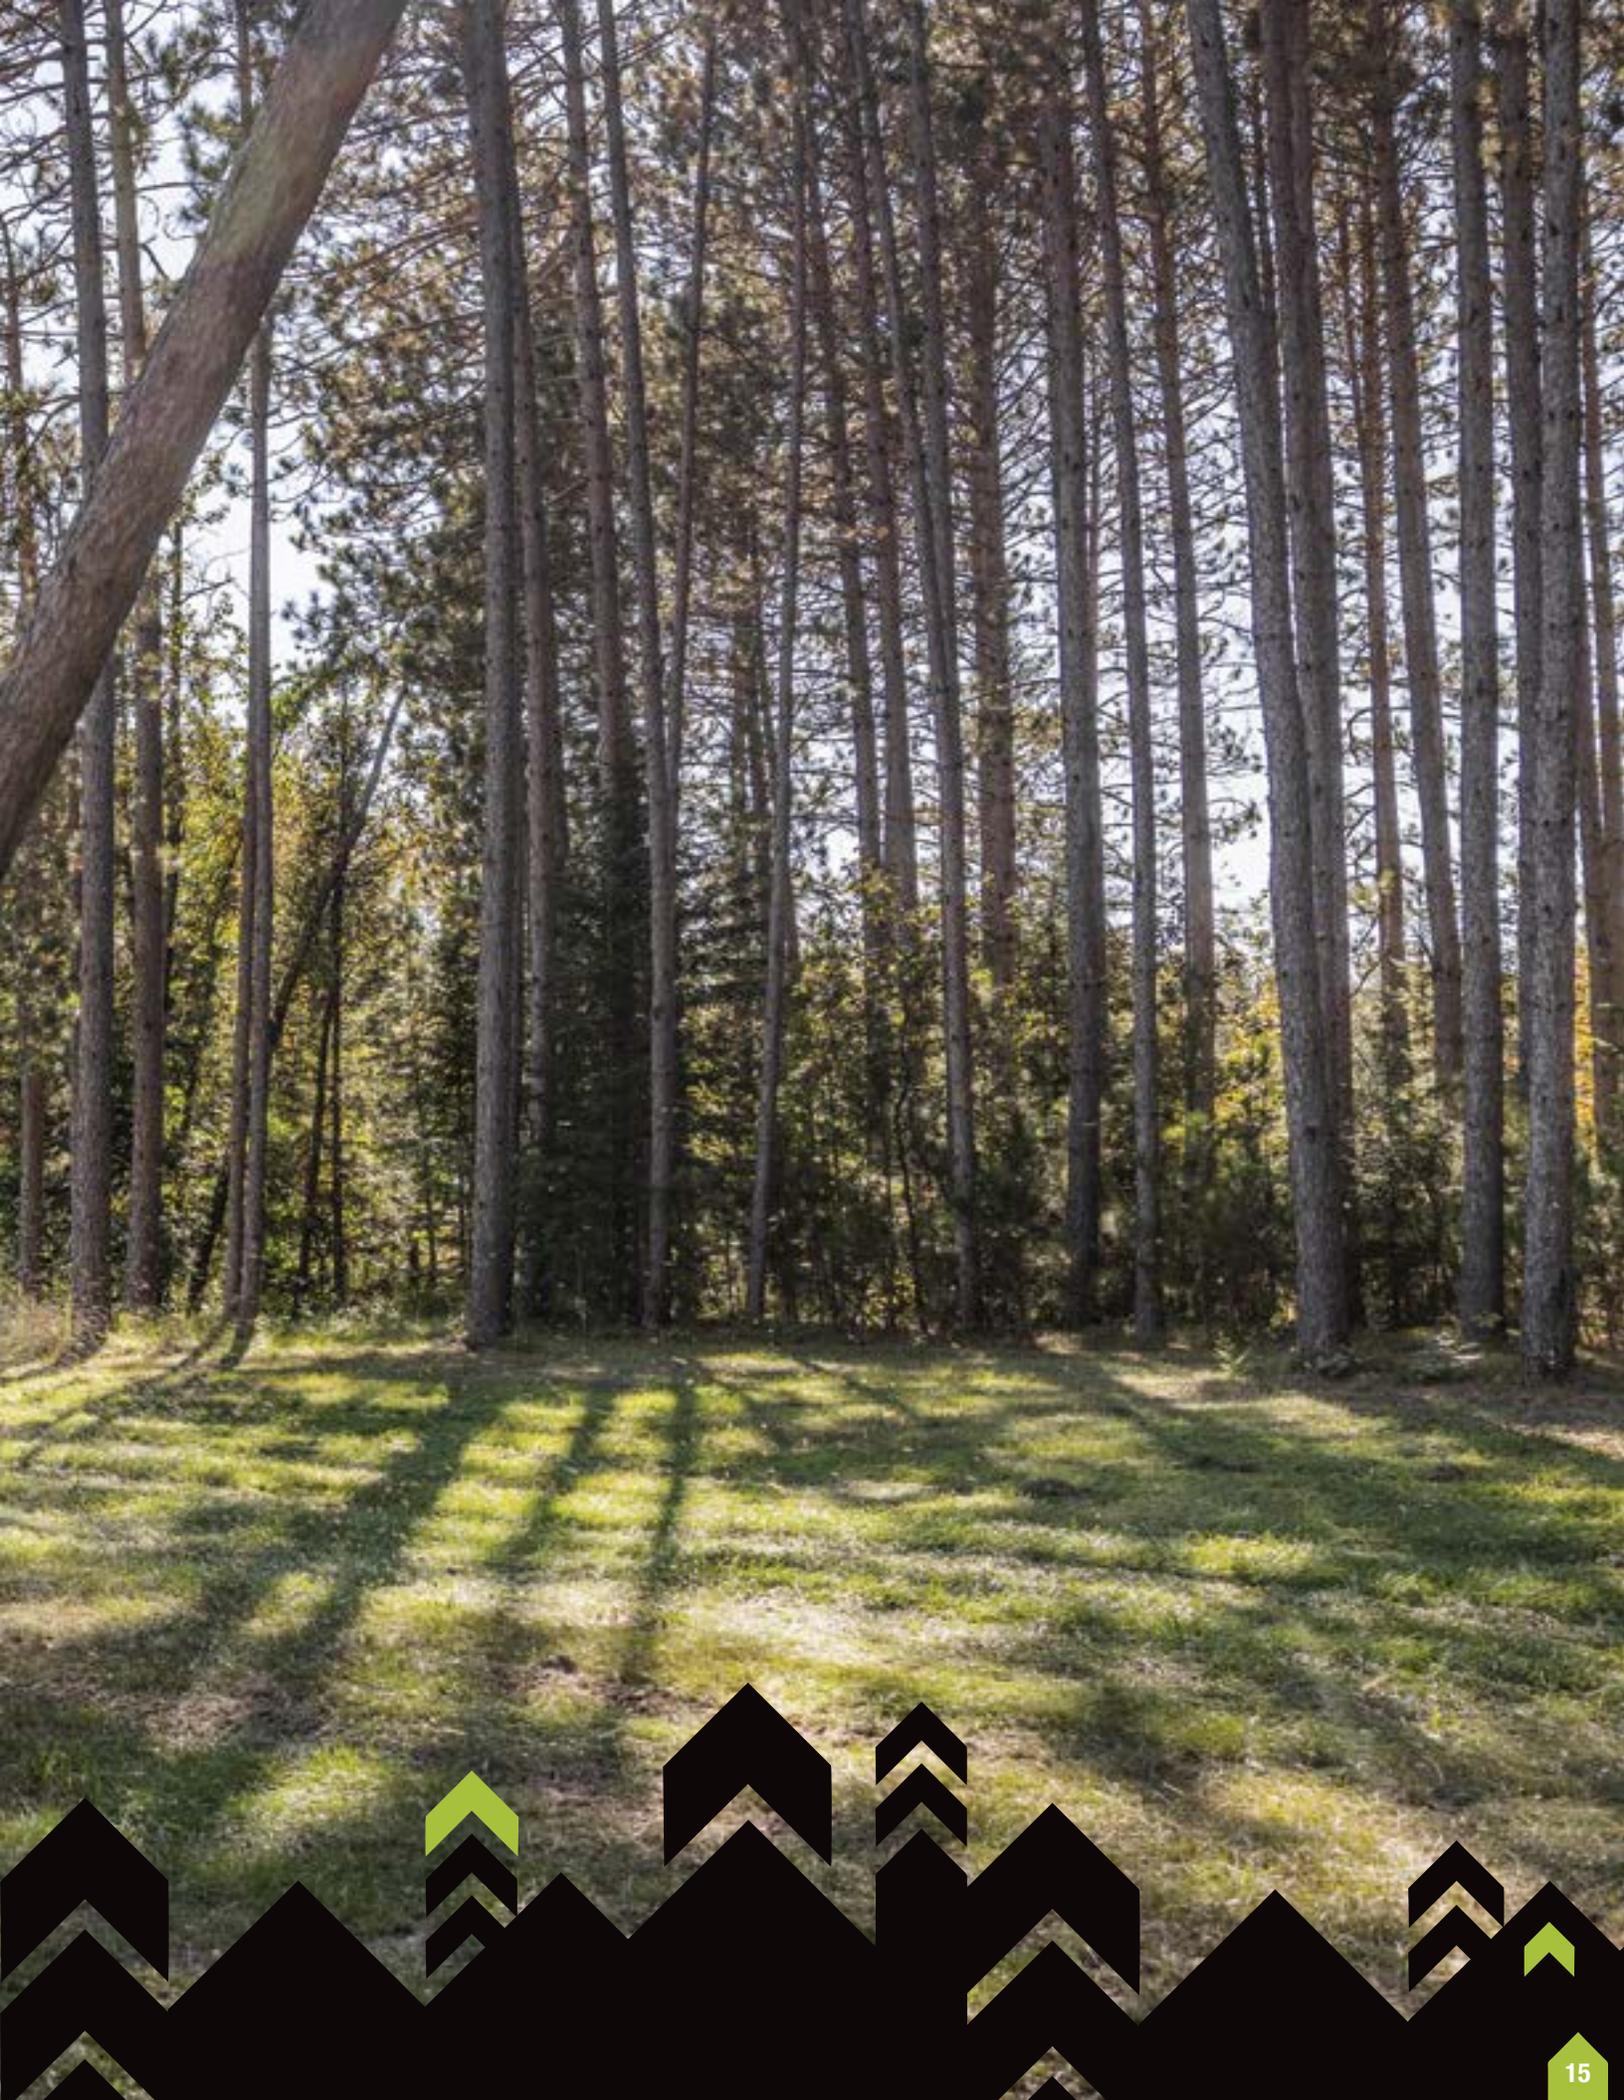



# SNOW ATTACHMENTS

Durable snow removal attachments  
for quick clearing.

# SNOWBLOWERS



Clear snow quickly down to the ground with ASV snowblowers featuring a no-freeze-up chute design.

- Throw snow up to 40' on larger models
- Direct drive hydraulic auger
- Replaceable bolt-on cutting edge
- No need for shear pins

COMPATIBLE MODELS	PART NO.	DESCRIPTION	CUTTING WIDTH (IN)	WEIGHT (LBS)	FLOW RATING (GPM)
RT-25 / RT-40	0405-282	Snowblower, 48 inch	48.0	650	10-16
RT-50	0405-283	Snowblower, 61 inch	61.0	810	10-16
RT-65 / VT-70 / RS-75 / RT-75 / VS-75 / VT-75 / VT-80	0405-369	Snowblower, 73 inch	73.0	870	22-26
RS-75 / RT-75 / VS-75 / VT-80 / VT-100	0405-370	Snowblower, 79 inch	79.0	890	31-36

# SNOW PUSHERS



Move large volumes of snow very quickly from parking lots, driveways and more with the ASV snow pushers.

- Strong, high-carbon steel cutting edge for long life
- 37" high side panels
- Quick Attach mounting for easy hook-up
- Optional rubber cutting edge
- Easy-adjust depth shoes
- Includes pull back for clearing snow next to structures and other obstacles

COMPATIBLE MODELS	PART NO.	DESCRIPTION	WIDTH (IN)	WEIGHT (LBS)
RT-65 / VT-70 / RS-75 / RT-75 / VS-75 / VT-75 / VT-80 / VT-100 / RT-135	0405-373	Pusher, Snow, 96 inch w/ pull back	96	900.0
RS-75 / RT-75 / VS-75 / VT-80 / VT-100 / RT-135	0405-374	Pusher, Snow, 120 inch w/ pull back	120	980.0

\* Cutting Edge, Rubber, 96 inch (ORDER THROUGH PARTS)

\* Cutting Edge, Rubber, 120 inch (ORDER THROUGH PARTS)

# ANGLE BLADES



Turn your ASV into a snow-clearing machine with durable angle blades.

- High-carbon steel cutting edge
- Easy adjust depth shoes
- 27° left/right angling
- Locking trip design for light grading and all-season use

COMPATIBLE MODELS	PART NO.	DESCRIPTION	WIDTH (IN)	WEIGHT (LBS)	WIDTH - ANGLED (IN)	SIDE ANGLE (DEG)
RT-25 / RT-40	0405-286	Blade, Angle, Snow/Light Material, ASV Mount, 60 inch, Hyd.	61.5	260.0	54.5	27

# V-BLADES



Use the ASV V-Blade's hydraulic cycling to break through deep drifts and clear snow with fewer passes.

- Hydraulically cycle through blade positions
- Automatically adapts to uneven ground while allowing full down pressure
- Independently angle blades 30 degrees forward or backward from cab
- Hydraulic crossover relief valve protects attachments by angling blades upon impact

COMPATIBLE MODELS	PART NO.	DESCRIPTION	WIDTH (IN)	WIDTH – OPEN (IN)	WEIGHT (LBS)
RT-25 / RT-40	0405-466	48 inch V-Blade, ASV Mount	51.8	54.8	330



# TRENCHERS



Heavy-duty trenchers are built for working in all conditions—and an attached crumber keeps your dig clean.

- Manual side-shift to trench close to objects (48" only)
- Direct drive motor
- Replaceable spoil auger

COMPATIBLE MODELS	PART NO.	DESCRIPTION	WEIGHT (LBS)	FLOW RATING (GPM)	TRENCH WIDTH (IN)	TRENCH DEPTH MAX (IN)
RT-25 / RT-40	0405-274	Trencher, ASV Mount, 36" x 6", 50/50 Cup with Bullet	575.0	7-16	6	36
RT-65 / VT-70 / RS-75 / RT-75 / VS-75 / VT-75 / VT-80 / VT-100 / RT-135	0405-366	Trencher, ISO, 48" x 6", 50/50 Cup with Bullet (Standard Flow)	980.0	15-25	6	48

# LANDSCAPING

Efficient ASV landscaping attachments for faster, more productive jobs.

# BRUSH MOWERS



Cut, clear, and mulch unwanted brush, thicket, grass and saplings. They're ideal for clearing trails, ditches, construction property sites and overgrown areas.

- Heavy duty gearbox and skid rails to glide across ground
- Pressure relief system for equipment protection
- Unique automatic float system (66" and 72" only)
- 6" roller contacts ground for smooth operation (66" and 72" only)

COMPATIBLE MODELS	PART NO.	DESCRIPTION	WIDTH (IN)	WEIGHT (LBS)
RT-25 / RT-40	0405-249	48 inch Brush Mower	48.1	470
RT-50 / RT-65 / VT-70 / VT-75	0405-447	66 inch Brush Mower	71.0	1295
RS-75 / RT-75 / VS-75 / VT-80 / VT-100 / RT-135	0405-361	73 inch Brush Mower	77.0	1360

# SOIL CONDITIONERS



ASV soil conditioners clear the way with a direct-drive motor and a tough set of tungsten-carbide teeth.

- Power angling, +/- 25 degrees
- Solid urethane wheels
- Floating connection leveling
- Removable box end/wing plates

COMPATIBLE MODELS	PART NO.	DESCRIPTION	WIDTH (IN)	WEIGHT (LBS)	FLOW RATING (GPM)
RT-25 / RT-40	0405-261	Soil Conditioner, 48in, Hyd. w/ float	56.8	380	9-17
RT-25 / RT-40	0405-262	Soil Conditioner, 60in, ASV, Hyd. w/ float	68.8	405	9-17
RT-50	0405-258	Soil Conditioner, 60in, ISO, Hyd. w/ float	68.8	405	9-17
RT-65 / VT-70 / RS-75 / RT-75 / VS-75 / VT-75 / VT-80	0405-363	Soil Conditioner, 72in, Hyd. w/ float	79.5	1,100	15-33
RS-75 / RT-75 / VS-75 / VT-80 / VT-100 / RT-135	0405-364	Soil Conditioner, 84in, Hyd. w/ float	91.5	1,200	15-33

# AUGER DRIVES



Your new ace in the hole. Load up ASV auger drive attachments to power your dig.

- Self-centering design
- 2" Hex shaft
- Planetary gear drive

COMPATIBLE MODELS	PART NO.	DESCRIPTION	WEIGHT (LBS)	MAX DIAMETER (IN)	FLOW RATING (GPM)	MAX CONTINUOUS PSI
RT-25 / RT-40	0405-265	Drive, Auger, ASV Mount, 2" Hex	303.0	30	7-16	3000
RT-50	0405-263	Drive, Auger, 15PD, 2" Hex	352.0	30	10-25	3000
RT-65 / VT-70 / RS-75 / RT-75 / VS-75 / VT-75 / VT-80 / VT-100 / RT-135	0405-365	Drive, Auger, 19PD, 2" Hex	354.0	36	15-30	3000

# AUGER BITS



From post holes to 3-foot craters, we offer seven bits that attach seamlessly to your auger drive for added versatility.

- 6", 9", 12", 18", 24", 30", 36"
- Heavy-duty design

COMPATIBLE MODELS	PART NO.	DESCRIPTION	WEIGHT (LBS)	DIAMETER (IN)
ALL	0405-266	Bit, Auger, 6 inch	58.0	6
ALL	0405-267	Bit, Auger, 9 inch	108.0	9
ALL	0405-268	Bit, Auger, 12 inch	128.0	12
ALL	0405-269	Bit, Auger, 18 inch	175.0	18
ALL	0405-270	Bit, Auger, 24 inch	209.0	24
ALL	0405-271	Bit, Auger, 30 inch	325.0	30
0405-365 ONLY	0405-272	Bit, Auger, 36 inch	392.0	36

# STUMP GRINDERS



Chew through any size stump in tight areas that would be difficult to access with larger equipment.

- Offset cutting wheel for better visibility
- Electric-over-hydraulic drive system
- Durable carbide teeth
- Bidirectional cutting for dual-pass operation

COMPATIBLE MODELS	PART NO.	DESCRIPTION	MAX CUTTING DIAMETER (IN)	MAX CUTTING DEPTH (IN)	FLOW RATE (GPM)	WEIGHT (LBS)	NUMBER OF TOOLS
RT-25 / RT-40	0405-296	Stump Grinder, ASV Mount	36	6 Below Ground	7-16	525	24
RT-65 / VT-70 / RS-75 / RT-75 / VS-75 / VT-75 / VT-80 / VT-100 / RT-135	0405-297	Hyd. Stump Grinder, Std.	32	8 Below Ground	15-30	540	32



# GRAPPLE RAKES



The grapple rake is designed with Grade 100 steel teeth, making it nearly three times stronger than regular steel.

- Greaseable hinge points ensure long life
- Optimal spacing between teeth allows unwanted debris to fall through
- Large, curved teeth provide optimal material grasping and raking

COMPATIBLE MODELS	PART NO.	DESCRIPTION	WIDTH (IN)	WEIGHT (LBS)
RT-25 / RT-40	0405-238	48 inch Grapple Rake	48.6	370
RT-50	0405-239	60 inch Grapple Rake	61.3	750
RT-65 / VT-70 / RS-75 / RT-75 / VS-75 / VT-75 / VT-80	0405-445	72 inch Grapple Rake	73.3	860
VT-100 / RT-135	0405-462	84 inch Grapple Rake	85.3	900

# GRAPPLE BUCKETS



This heavy-duty implement moves difficult-to-handle material like scrap, waste and rocks with ease.

- Independent grapples grab uneven loads
- Gusseted tines ensure strength and longevity
- Two heavy duty cylinders

COMPATIBLE MODELS	PART NO.	DESCRIPTION	WIDTH (IN)	WEIGHT (LBS)
RT-25 / RT-40	0405-241	48 inch Grapple Bucket	49.8	310
RT-65 / VT-70	0405-446	66 inch Grapple Bucket	68.0	830
RT-65 / VT-70 / RS-75 / RT-75 / VS-75 / VT-75 / VT-80	0405-359	72 inch Grapple Bucket	74.0	860
RS-75 / RT-75 / VS-75 / VT-80 / VT-100 / RT-135	0405-360	84 inch Grapple Bucket	86.0	915







**HIGH  
PERFORMANCE  
FROM TOP TO BOTTOM**



OPTIMIZED FOR YOUR ASV MACHINE // LOCAL DEALER NETWORK SUPPORT  
24-MONTH WARRANTY ON EVERY ATTACHMENT // FINANCING AVAILABLE



**CONTACT YOUR ASV DEALER TO ORDER.**  
Visit [asvi.com/attachments](http://asvi.com/attachments) for more information.